

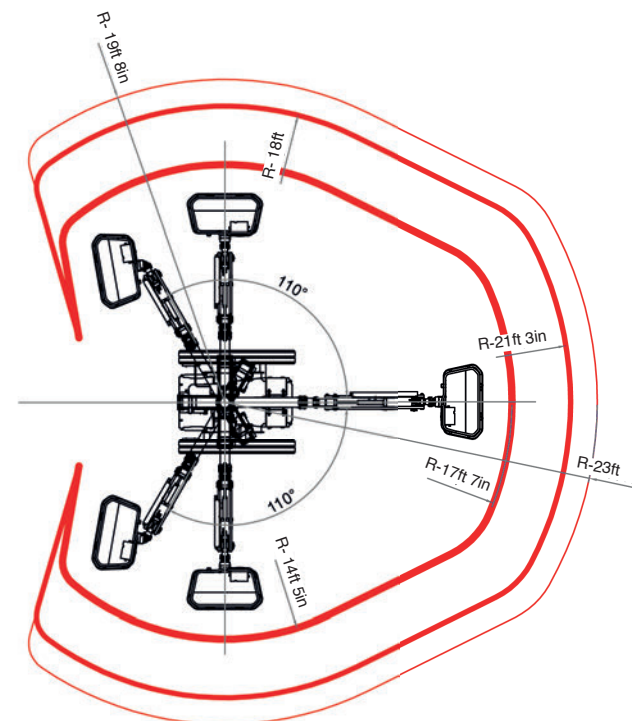
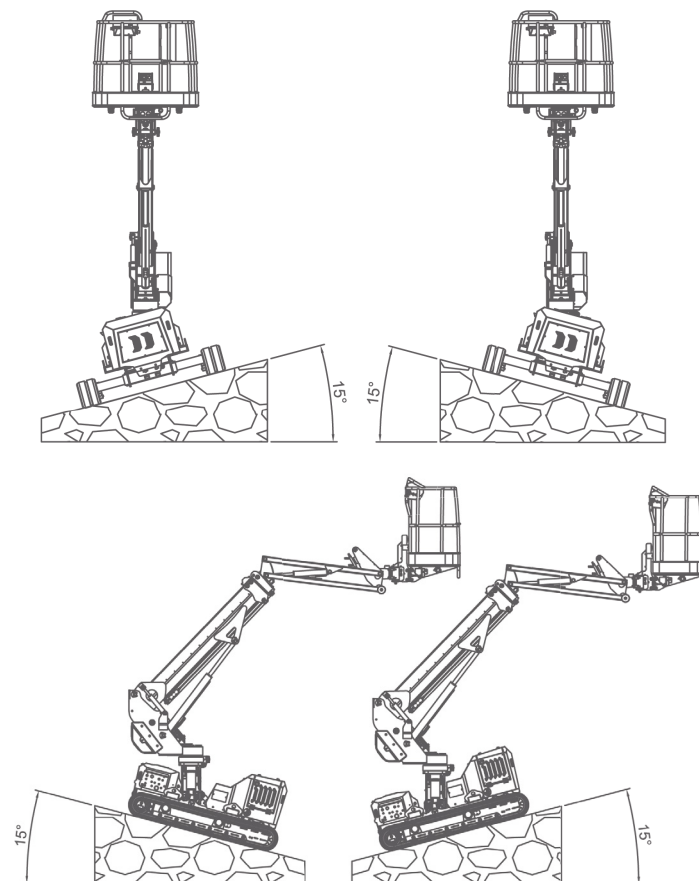


# JIBBI 40 BL-W EVO

|          |          |         |                |         |                |
|----------|----------|---------|----------------|---------|----------------|
| 40ft     | 507 lbs. | 19.2 hp | $\pm 15^\circ$ | 1.5 mph | $\pm 15^\circ$ |
| MAX W.H. | CAPACITY | POWER   | LONG. LEVEL    | SPEED   | LATER. LEVEL   |

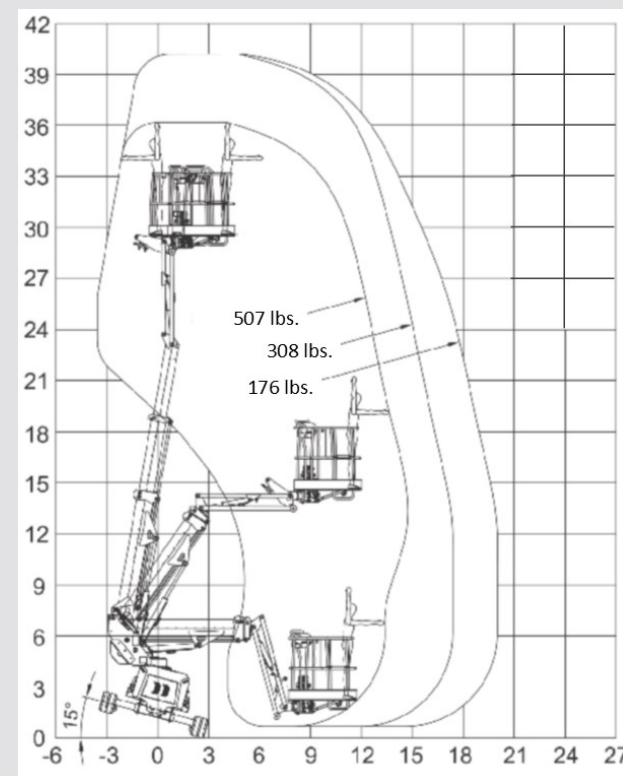

We reserve the right to make alterations to make alterations.

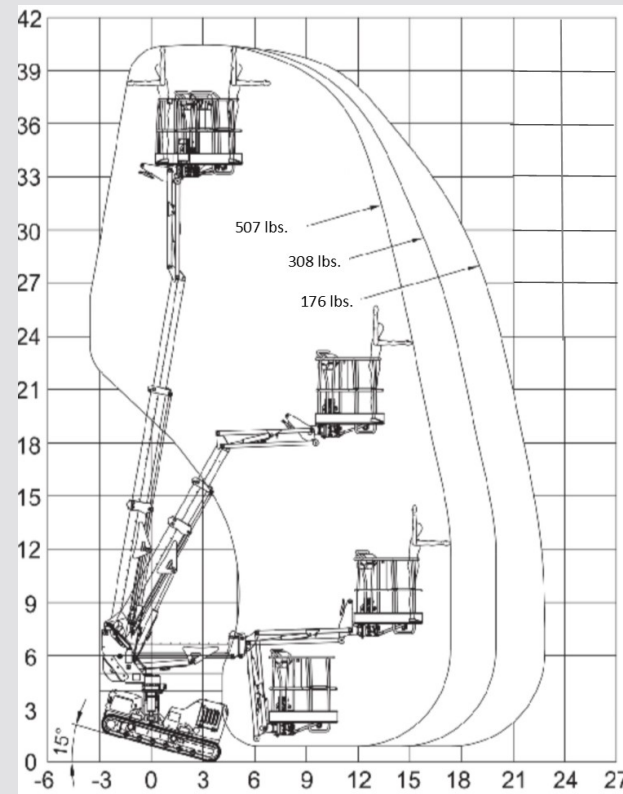

Toll free: 866-358-708

[www.ruthmannreachmaster.com](http://www.ruthmannreachmaster.com)

# JIBBI 40 BL-W EVO

PATENT PENDING



COMPACT ALL-TERRAIN BOOM






# JIBBI 40 BL-W EVO



Cable remote control by AUTECH

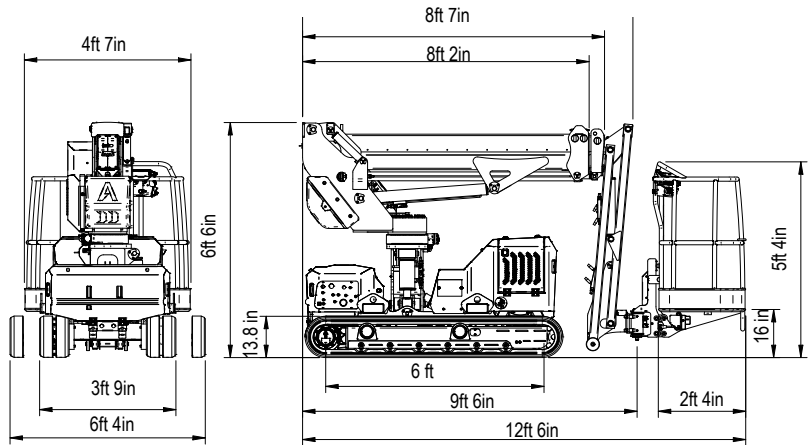

## Features

- Yanmar Diesel Engine, 3 Cylinders - (14,1kW - 19,2 HP)
- 240° Turret rotation
- Basket rotation - +/- 70°
- Integrated Drive System (using single joystick)

Ultrasonic  
Anti-collision  
System

Automatic & Dynamic Levelling  
Pro-Active Levelling



# JIBBI 40 BL-W EVO



## Technical data

|                    |                                         |
|--------------------|-----------------------------------------|
| 40ft               | Max working height                      |
| 33ft 8in           | Max platform height                     |
| 26ft 2in           | Moving height                           |
| 23ft               | Max outreach (load 176 lbs.)            |
| 17ft 7in           | Max outreach (load 507 lbs.)            |
| +/- 110°           | Rotation angle                          |
| 4ft 7in x 2ft 4in  | Basket size                             |
| +/- 70°            | Basket rotation angle                   |
| 507 lbs.           | Max basket capacity                     |
| 12ft 6in (9ft 6in) | Length in stowed (with detached basket) |
| 3ft 9in            | Min width in stowed position            |
| 6ft 4in            | Max working width                       |
| 6ft 6in            | Min height in stowed position           |
| +/- 15°            | Longitudinal leveling                   |
| +/- 15°            | Lateral leveling                        |
| 25°                | Max gradeability                        |
| 25°                | Max side gradeability                   |
| 1.55 mph           | Drive speed (fast)                      |
| .19 mph            | Slow speed                              |

## Weights

|            |                 |
|------------|-----------------|
| 3,86 kN/m2 | Ground pressure |
| 6283 lbs   | Total weight    |

## Power

14 kW - 19,2 Hp 3TNM68 -AS Yanmar engine (diesel)

## Options

### Standard

- Cable remote control
- Yanmar Diesel Engine

- Electric pump 220V-2,2KW / 50Hz (Weight + 66 lbs.)
- Wireless remote control
- Winch kit 440 lbs.
- Non-marking tracks
- Arctic lubricant for cold climate



Compact dimensions  
Removable basket

