

## STANDARD FEATURES

SR69 Series

### All Models

- Indoor and Outdoor Rated
  - Proportional Controls
  - Foldable Guardrails
  - Self-lock Entry Gate
  - Tilt Alarm with Lift Cutout
  - Overload Sensing System
  - Descent Alarm with Flashing Beacons
  - All Motion Alarm
  - Full-height Drive
  - Intelligent Diagnostic System
  - Horn/Hour Meter
  - Oscillating Axle
  - Auto-leveling Outriggers
  - AC Power to Platform
- Electric Models
- Rear-wheel Drive & Brakes
- Diesel Models
- Four-wheel Drive & Brakes


## OPTIONAL FEATURES

SR69 Series


### All Models

- Solid Tires
  - Solid Non-marking Tires
  - GPS
- Electric Models
- Maintenance-free Batteries
  - Lithium Batteries
  - Foam-filled Tires
- Diesel Models
- Hydraulic Generator
  - Foam-filled Non-marking Tires

## SR69 Series Diagram

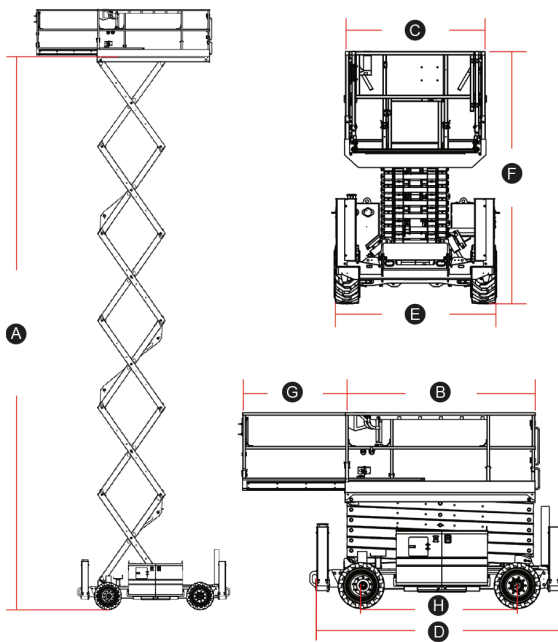

## SR90 Series Diagram

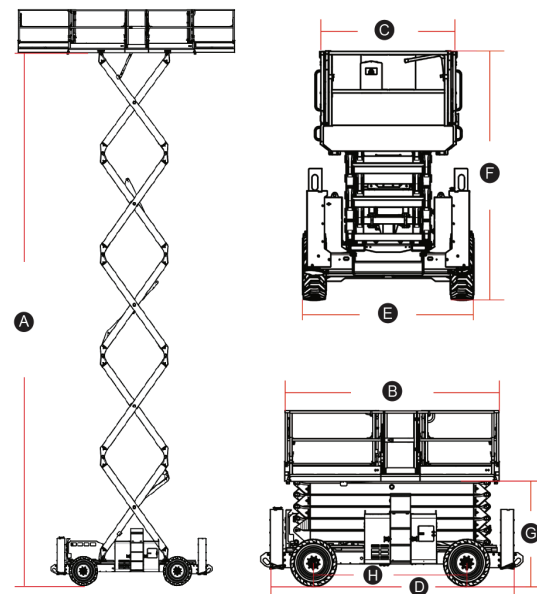

## STANDARD FEATURES

SR90 Series

- Indoor and Outdoor Rated
- Proportional Controls
- Foldable Guardrails
- Emergency Stop Devices
- Emergency Descent
- Self-lock Entry Gate
- Tilt Alarm with Lift Cutout
- Overload Sensing System
- Descent Alarm with Flashing Beacons
- Full-height Drive
- Intelligent Diagnostic System
- Auto-leveling Outriggers
- Oscillating Axle
- Horn/Hour Meter
- Four-wheel Drive & Brakes
- AC Power to Platform

## OPTIONAL

SR90 Series

- Hydraulic Generator
- Solid Non-marking Tires
- Foam-filled Tires
- Foam-filled Non-Marking Tires

# LGMG

## ROUGH TERRAIN

### SCISSOR LIFTS

[www.LGMGNA.com](http://www.LGMGNA.com)

[www.LGMGLifts.com](http://www.LGMGLifts.com)



2022 V01 (Printed and Valid December 2022)

Specifications subject to change without notice. All photos and diagrams in this brochure are for promotional purposes only.

## LGMG North America Inc.

Address: 4105 Live Oak Drive, Building B-Suite 2000, The Colony, TX 75056

Email: [Sales@lmgna.com](mailto:Sales@lmgna.com) Phone: 1-833-288-5464

[www.LGMGLifts.com](http://www.LGMGLifts.com)

[www.LGMGNA.com](http://www.LGMGNA.com)



RELIABILITY IN ACTION



ELECTRIC ROUGH TERRAIN SCISSOR LIFTS

Models	SR2669E		SR3369E		SR4069E		SR4669E	
Specifications	US	Metric	US	Metric	US	Metric	US	Metric
Max Working Height (Indoor/Outdoor)	31' 10"	9.7m	38' 5"	11.7m	45' 11"	13.9m	51' 10"	15.8m
A) Max Platform Height (Indoor/Outdoor)	25' 3"	7.7m	31' 10"	9.7m	39'	11.9m	45' 3"	13.8m
Platform Height (Stowed)	4' 7.5" / 1.41m				5' 1.5"	1.56m	Unknown Currently	
B) Platform Length	9' 2" / 2.79m							
C) Platform Width	5' 3" / 1.6m							
D) Overall Length	10' 2.5"	3.11m	12' 4" / 3.76m				12' 3"	3.73m
E) Overall Width	5' 10.5" / 1.79m						6'	1.84m
F) Machine Height (Rails Up)	8' 6"	2.58m	8' 4.5"	2.55m	8' 10.5'	2.7m	9' 6"	2.9m
Machine Height (Rails Down)	6' 2.5" / 1.89m				6' 8"	2.04m	7' 4"	2.24m
G) Extension Deck	5' / 1.52m						4' 11"	1.5m
H) Wheelbase	6' 3.1" / 2.29m						7' 6"	2.29m
Ground Clearance	9" / 0.23m							
Productivity								
Platform Capacity	1,499lbs	680kg	1,000lbs	454kg	805lbs / 365kg			
Extension Deck Capacity	310lbs / 140kg							
Drive Height	Full Height							
Platform Occupants (Indoor/Outdoor)	4 / 4		4 / 2		3 / 2		2 / 2	
Outside Turning Radius	15' 7" / 4.75m							
Gradeability	40%		35%					
Raise/Lower Speed	35 / 30 secs		39 / 46 secs		61 / 55 secs		80 / 60 secs	
Brakes	Rear Wheel Brakes							
Drive Mode	4x2							
Tire Type	Foam-filled Non-marking						Solid Foam-filled	
Tire Size	26x12in / 663x283mm							
Power								
Power Source	48V DC 315Ah						48V DC 390Ah	
Hydraulic System								
Hydraulic Oil Capacity	13.21gal	50L	18.5gal / 70L				13.2gal	50L
Weight								
Machine Weight w/ Outriggers	8,981lbs	4,074kg	9,570lbs	4,350kg	11,245lbs	5,100kg	13,800lbs	6,260kg

DIESEL ROUGH TERRAIN SCISSOR LIFTS

Models	SR2669D		SR3369D		SR4069D		SR3390D		SR4390D		SR5390D	
Specifications	US	Metric	US	Metric	US	Metric	US	Metric	US	Metric	US	Metric
Max Working Height (Indoor/Outdoor)	31' 10"	9.7m	38' 5"	11.7m	45' 11"	13.9m	39' 5"	12m	49' 2"	15m	58' 8"	17.9m
A) Max Platform Height (Indoor/Outdoor)	25' 3"	7.7m	31' 10"	9.7m	39'	11.9m	32' 10"	10m	42' 8"	13m	52' 2"	15.9m
Platform Height (Stowed) (G for SR90 Series)	4' 7.5" / 1.41m				5' 1.5"	1.56m	5' 2"	1.58m	6'	1.83m	6' 10"	2.08m
B) Platform Length	9' 2" / 2.79m						13' / 3.98m					
C) Platform Width	5' 3" / 1.6m						6' / 1.83m					
D) Overall Length	10' 2.5"	3.11m	12' 4" / 3.76m				16' 1" / 4.9m					
E) Overall Width	5' 10.5" / 1.79m						7' 7" / 2.3m					
F) Machine Height (Rails Up)	8' 6"	2.58m	8' 4.5"	2.55m	8' 10.5'	2.7m	9'	2.74m	9' 9"	2.96m	10' 6"	3.18m
Machine Height (Rails Down)	6' 2.5" / 1.89m				6' 8"	2.04m	6' 9"	2.06m	7' 6"	2.28m	8' 2.5"	2.5m
G) Extension Deck (G for SR69 Series) (Dual Decks SR90 Series)	5' / 1.52m						4' 9" and 3' 9" / 1.45m and 1.14m					
H) Wheelbase	6' 3.1" / 2.29m						9' 4.2" / 2.85m					
Ground Clearance	9" / 0.23m											
Productivity												
Platform Capacity	1,499lbs	680kg	1,000lbs	454kg	805lbs	365kg	2,425lbs	1,100kg	2,005lbs	910kg	1,500lbs	680kg
Extension Deck Capacity	310lbs / 140kg						510lbs / 230kg					
Drive Height	Full Height								27' 11" / 8.5m			
Platform Occupants (Indoor/Outdoor)	4 / 4		4 / 2		3 / 2		7 / 7				4 / 4	
Outside Turning Radius	15' 7" / 4.75m						17' 6" / 5.33m					
Gradeability	40%		35%				40%					
Raise/Lower Speed	35 / 30 secs		39 / 46 secs		61 / 55 secs		45 / 45 secs		55 / 55 secs			
Brakes	Four Wheel Brakes											
Drive Mode	4x4											
Tire Type	Foam-filled						Solid					
Tire Size	26x12in / 663x283mm						33x12in / 835x290mm					
Power												
Power Source	24.8hp / 18.5kw						48.8hp / 36.4kw					
Fuel Tank Capacity	14gal / 53L						30gal / 110L					
Hydraulic System												
Hydraulic Oil Capacity	13.21gal	50L	18.5gal / 70L				37gal / 140L					
Weight												
Machine Weight w/ Outriggers	8,937lbs	4,054kg	9,768lbs	4,330kg	11,176lbs	5,080kg	15,400lbs	6,980kg	16,450lbs	7,460kg	18,080lbs	8,200kg