LGMG SREEGOD

DUAL FUEL RT SCISSOR LIFT

- Larger work platform with high capacity offers great productivity.
- Dual fuel independent supply system, driven by gasoline or LPG.
- Oscillating axles and four-wheel drive provide better performance on rough terrain job sites.
- The overload system and motion alarm help the operator to complete the job in a much safer way.
- On-board self-diagnosis system makes it easier for quick troubleshooting.


LGMG Dual Fuel RT Scissor Lift


SPECIFICATIONS

MODELS	SR3369D (S	R1018D)	
Measurements	Imperial	Metric	
Work Height Max.	38'5"	11.7m	
Platform Height - Raised	31'10''	9.7m	
Platform Height - Stowed	4'9''	1.45m	
Platform Length	9'2"	2.79m	
Platform Width	5'3"	1.6m	
Overall Length (with ladder)	12'4"	3.76m	
Overall Width	5'10"	1.79m	
Overall Height - Rails up	8'4"	2.55m	
Overall Height - Rails down	6'2"	1.89m	
Extension Deck	5'	1.52m	
Wheelbase	7'6''	2.29m	
Ground Clearance-Center	9''	0.23m	
PRODUCTIVITY			
Max. Platform Occupancy	4(in) / 2(out)		
Platform Capacity	1000 lbs	454kg	
Platform Capacity - Extension	310 lbs	140kg	
Drive Height	Full Height		
Gradeability - Stowed	35	35%	
Min. Turning Radius	15'7''	4.75m	
Raise/Lower Speed	39 / 46s		
Brakes	Four-wheel brake		
Drive Mode	4>	4x4	
Tires Type	RT Foam-filled		
Tires Size	26"x12"	663x283mm	
POWER			
Power Source	Kubota WG972 20.5kW/27.5hp Gas/LPG Dual Fuel		
Fuel Tank Capacity	14gal	53L	
HYDRAULIC SYSTEM			
Hydraulic Oil Volume	13.2gal	50L	
WEIGHT			

STANDARD FEATURES	
Proportional control	Emergency stop device
Foldable guardrail	Manual brake release
Emergency descent	Tilt alarm with lift cut-out
Oscillating axle	Overload sensing system
Self-lock entry gate	Intelligent diagnostic system
All motions alarm	Descent alarm with flashing beacon
Auto-leveling outriggers	RT Foam-filled tires

OPTIONAL	
Telematics	Solid tires
AC power to platform	Solid non-marking tires
Cold weather package	Foam-filled non-marking tires
Biodegradable hydraulic oil	

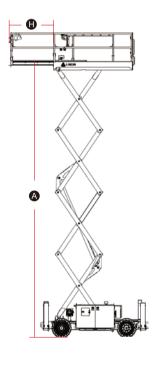



Please contact LGMG or local dealer for more details.

Machine Weight with Outriggers (CE/ANSI)

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purpose only. This brochure comes into effect in May, 2023.

4330kg

9545 lbs

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China Email: sales@lgmg.com.cn Tel: +86 531 6787 9283

LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands Email: sales@lgmgeurope.com Tel: +31 850 642 777

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States Email: sales@lgmgna.com Tel: +1 833 288 5464

