

LGMG

T26J-H

TELESCOPIC BOOM LIFT

LGMG has a complete line of engine-driven, high-capacity telescopic boom aerial work platforms, with the maximum working height ranging from 21.8 to 29.8 meters (71' 6" / 97' 9"). With a double capacity design of 450/300kg (992/661lbs), the machine can allow up to 3 people to work at the same time both indoors and outdoors, which greatly improves work efficiency.



LGMG Diesel Telescopic Boom Lift

SPECIFICATIONS

MODELS	T26J-H (T85J-H)	
	Metric	Imperial
Measurements		
Work Height Max.	27.9m	91'6"
Platform Height Max.	25.9m	85'
Horizontal Outreach Max.	21.6m	70'10"
Platform Length	2.44m	8'
Platform Width	0.9m	2'11"
A Stowed Length	12.72m	41'9"
Length-Transport (jib tucked)	11m	36'1"
B Overall Width	2.5m	8'2"
C Stowed Height	2.83m	9'3"
Height-Transport	3.03m	9'11"
D Wheelbase	2.85m	9'4"
E Ground Clearance	0.43m	1'5"

PRODUCTIVITY	
Max. Platform Occupants	2 (unrestricted) / 3 (restricted)
Platform Capacity (unrestricted)	300kg / 661 lbs
Platform Capacity (restricted)	450kg / 992 lbs
Turntable Rotation	360°Continuous
Drive Speed-Stowed	4.8km/h / 3mph
Drive Speed-Raised	0.8km/h / 0.5mph
Gradeability	45%
Max. Wind Speed	12.5m/s / 28mph
Turning Radius-Inside	3.66m / 12'
Turning Radius-Outside	6.55m / 21'6"
Max.Slope	5°/5° / 5°/5°
Tire Type	RT Foam-filled
Tire Size	18-625 / 18-625



POWER	
Power	Deutz TD2.9L4 / Kubota V3307
Fuel Tank Capacity	100L / 26.4gal

HYDRAULIC SYSTEM	
Hydraulic Oil Volume	180L / 47.5gal

WEIGHT	
Machine Weight (CE/ANSI)	18300kg / 40345 lbs

STANDARD FEATURES	
Proportional control	Emergency stop button
Horn/Hour meter	Auto-leveling platform
Platform control cover	Anti-collision protection
Flashing beacons	Over-tilt protection system
Cylinder bellows	Overload sensing system
Platform tool box	Intelligent diagnostic system
Oscillating axle	Descent alarm with flashing beacon
Telematics connector	RT Foam-filled tires

OPTIONAL	
Telematics	Foam-filled non-marking tires
Glazier kit	Half-height mesh platform
Auxiliary rail	AC power to platform
Hydraulic generator kit	3.5kw Hydraulic generator
Hydraulic oil radiator	Biodegradable hydraulic oil
Cold weather package	

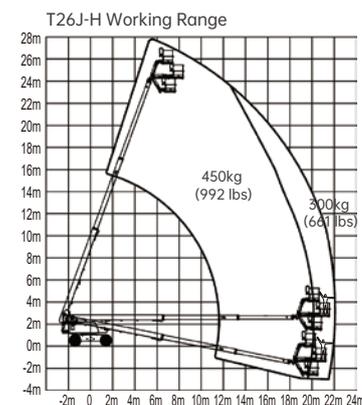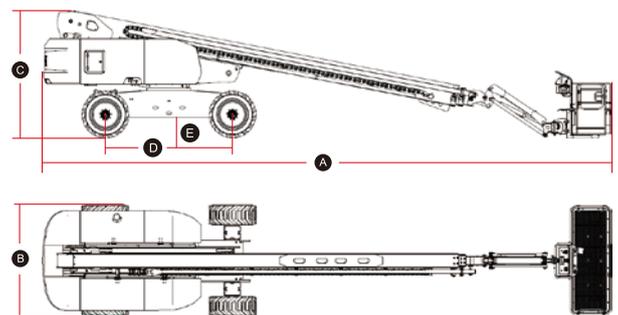

Please contact LGMG or a local dealer for more details.
LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.
This brochure comes into effect in May, 2023.

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China
Email: sales@lmgm.com.cn Tel: +86 531 6787 9283

LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands
Email: sales@lmgmeurope.com Tel: +31 850 642 777

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States
Email: sales@lmgmna.com Tel: +1 833 288 5464

www.lmgmlifts.com



LGMG
RELIABILITY IN ACTION