


LGMG

SR0818D

DIESEL RT SCISSOR LIFT

- Larger work platform with high capacity offers great productivity.
- Powerful diesel engine, oscillating axels and four-wheel drive provides better performance on most rough terrain job sites.
- The overload system and motion alarm help the operator to complete the job in a much safer way.
- Pull-out engine tray for easy access and maintenance.
- On-board self-diagnosis system makes it easier for quick troubleshooting.

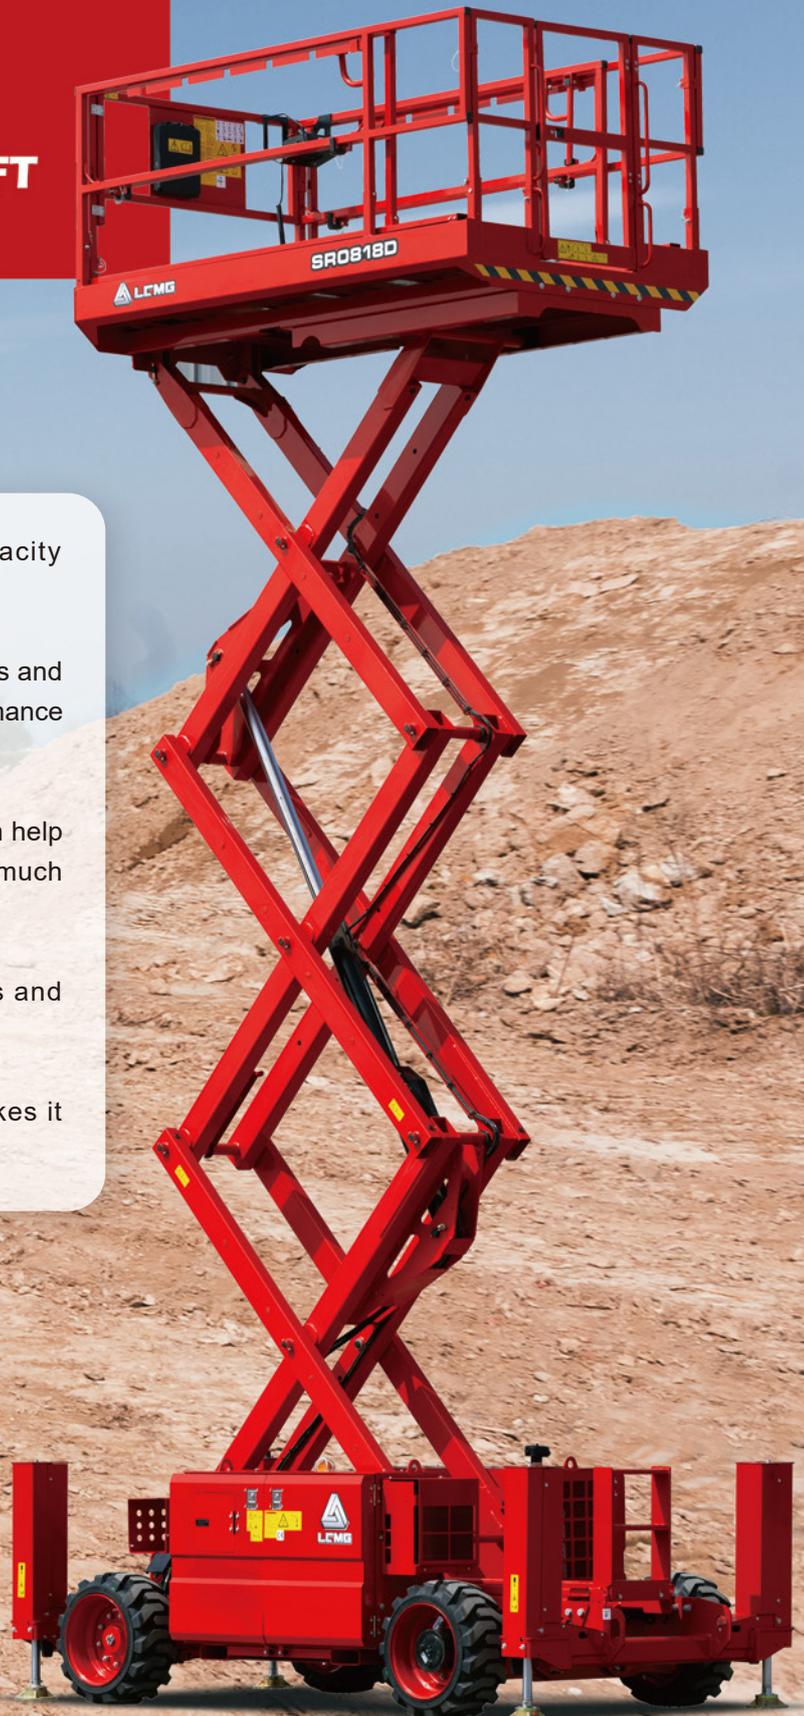

LGMG DIESEL RT Scissor Lift

SPECIFICATIONS

MODELS	SR0818D (SR2669D)	
Measurements	Metric	Imperial
Work Height Max.	9.7m	31'10"
A Platform Height - Raised	7.7m	25'3"
B Platform Height - Stowed	1.41m	4'8"
C Platform Length	2.79m	9'2"
D Platform Width	1.6m	5'3"
E Overall Length (with ladder) *	3.11 / 3.76m	10'2"/12'4"
F Overall Width	1.79m	5'10"
G Overall Height - Rails up	2.58m	8'6"
Overall Height - Rails down	1.89m	6'2"
H Extension Deck	1.52m	5'
I Wheelbase	2.29m	7'6"
Ground Clearance-Center	0.23m	9"

PRODUCTIVITY

Max. Platform Occupancy	4 (in) / 4 (out)	
Platform Capacity	680kg	1499 lbs
Platform Capacity - Extension	140kg	310 lbs
Drive Height	Full Height	
Gradeability - Stowed	40%	
Min. Turning Radius	4.75m	15'7"
Raise/Lower Speed	35 / 30s	
Brakes	Four-wheel brake	
Drive Mode	4x4	
Tire Type	RT Foam-filled	
Tire Size	663x283mm	26"x11"

POWER

Power Source	Kubota D1105 18.5kw/24.8hp	
Fuel Tank Capacity	53L	14gal

HYDRAULIC SYSTEM

Hydraulic Oil Volume	50L	13.21gal
----------------------	-----	----------

WEIGHT

Machine Weight with Outriggers (CE/ANSI) **	4170kg	9193 lbs
Machine Weight without Outriggers (CE/ANSI)	3700kg	8157 lbs

* Overall length without outriggers is 3.11m (10'2"), with outriggers is 3.76m (12'4").
 ** Hydraulic outriggers are optional for SR0818D.


Please contact LGMG or a local dealer for more details.
 LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.
 This brochure comes into effect in May, 2023.

STANDARD FEATURES

Proportional control	Emergency stop device
Foldable guardrail	Manual brake release
Emergency descent	Tilt alarm with lift cut-out
Oscillating axle	Overload sensing system
Self-lock entry gate	Intelligent diagnostic system
All motions alarm	Descent alarm with flashing beacon
RT Foam-filled tires	

OPTIONAL

Telematics	Solid tires
AC power to platform	Solid non-marking tires
Auto-leveling outriggers	Foam-filled non-marking tires
Cold weather package	Biodegradable hydraulic oil

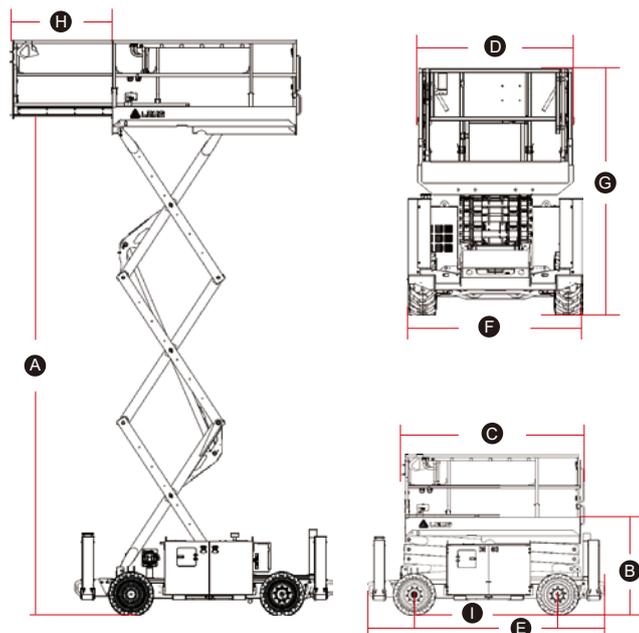

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China
 Email: sales@lmgm.com.cn Tel: +86 531 6787 9283

LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands
 Email: sales@lmgmeurope.com Tel: +31 850 642 777

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States
 Email: sales@lmgmna.com Tel: +1 833 288 5464

www.lmgmlifts.com

 **LGMG**
 RELIABILITY IN ACTION